


# 4-20mA

## 4-20mA Interface for 0-5v

4-20mA – spec v02

Supply Voltage for 0-5v signal	8 to 38v
Supply Current (Interface only)	≤ 22mA
Output Signal	4-20mA
Input Signal	0-5v
Sensor Supply Voltage for 0-5v signal	6.5v
Dimensions	45 x 17 x 9.5mm
Material	Aluminium
Weight (without cable)	20g
Protection	IP64
Vibration Test	20Gpp 5'
Shock	500 G
Operating Temperature	0 to +85°C
Storage Temperature	-40 to +125°C

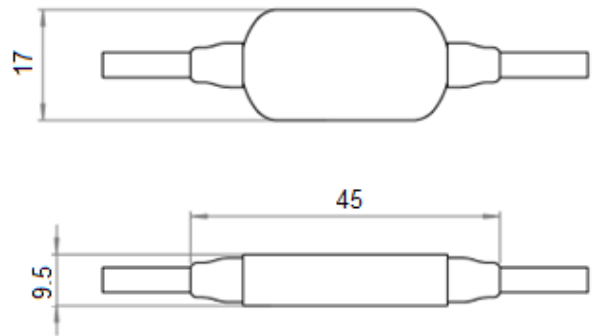

### A. Output

Cable: 3x26 AWG FEP Tinned copper braided cable 250 v 200°C

Cable to Sensor		
Colour	Function	Pin
Red	Supply	
Black	0 v	
White	Signal	
Braid	Not Connected	

### B.

Cable: 3x26 AWG FEP Tinned copper braided cable 250 v 200°C

Cable to logger		
Colour	Function	Pin
Red	Supply	
Black	0 v	
White	Output Signal	
Braid	Not Connected	

